



## Industrial 8-port Unmanaged Gigabit Ethernet Switch

■ ■ EHG2308  
RoHS compliant

### Technology

- 10/100/1000BaseT(X) (RJ45)
- Broadcast storm protection
- Support IEEE 802.3/ 802.3u/ 802.3x
- 10/100/1000M Full/Half-Duplex, MDI/MDI-X auto-detection


### Reliability

- Redundant dual DC power inputs
- Operating temperature ranges from -10~70°C
- Rugged high-strength housing
- DIN-Rail or wall mounting ability

EHG2308 with 8 RJ-45 Gigabit ports for your industrial applications. It designs to work in the industrial environment, such as in hazardous locations that comply with CE, FCC, UL, IP50 and RoHS standards.

EHG2308 protects itself from receiving too many broadcast packets. During normal use, broadcast packets will be forwarded to all ports except the source port. However, it will discard broadcast or multicast packets if the number of those packets exceeds a threshold in a preset period of time. When the preset period expires (about 800ms), it will then resume receiving broadcast or multicast packets until the threshold is reached again.

EHG2308 provides two redundant power inputs that can be connected simultaneously to wide-range DC power sources. If one of the power inputs failure, the other live source acts as a backup to provide the EHG2308 power needs automatically.

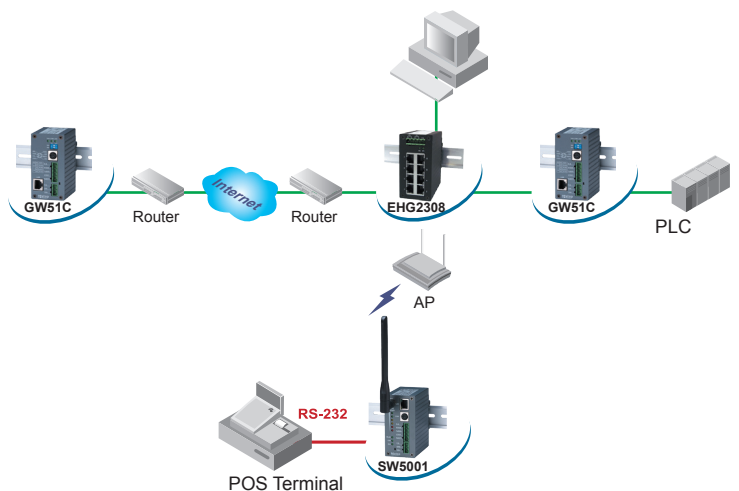

# Industrial 8-port Unmanaged Gigabit Ethernet Switch



## Specifications

### Technology

Standards	IEEE802.3, 802.3u, 802.3ab, 802.3x
Processing Type	Store and Forward
Flow Control	IEEE802.3x full duplex, back pressure flow control

### Interface

RJ45 Ports	10/100/1000BaseT(X) auto negotiation speed Full/Half-duplex mode, and auto MDI/MDI-X connection
LED Indicators	Power, LAN(10/100/1000M)

### Power Management

Input Voltage	9-48 VDC(0.45A max), Dual inputs
Consumption	4.05 Watts Max
Connector	Removable 5-pin Terminal Block for power input
Reverse Polarity Protection	Present

### Physical Characteristics

Housing	IP50 protection, metal housing
Dimension(W x H x D)	45.2mm x 90mm x 78mm
Weight	255g

### Environmental Limits

Operating Temperature	-10°C~70°C (14°F~158°F)
Storage Temperature	-40°C~85°C (-40°F~185°F)
Ambient Relative Humidity	5%~95% non-condensing

**Notes:**  
For UL policy the maximum operating temperature is 50°C, and the human body can tolerate maximum temperature is 70°C.

### Regulatory Approvals

UL(Safety)	UL60950-1 2nd Ed. /CSA C22.2 No.60950-1-07 2nd Ed.
FCC(EMI)	FCC Part 15, Subpart B, Class A
CE(EMI)	European Standard EN 55022:2006/A1:2007 Class A. EN61000-3-2:2006, EN 61000-3-3:1995/A1:2001/A2:2005
CE(EMS)	EN55024:1998/A1:2001/A2:2003(IEC 61000-4-2:1995/A2:2000) IEC61000-4-3:2002, IEC 61000-4-4:2004 IEC 61000-4-5:1995/A1:2000, IEC 61000-4-6:1996/A1:2000 IEC 61000-4-8 :1993/A1:2000, IEC 61000-4-11:1994/A :2000


Shock	IEC 60068-2-27
Drop	IEC 60068-2-32(ISTA Test Procedure 2A)
Vibration	IEC 60068-2-64
RoHS	Lead(Pb) Free
MTBF	TBD
IP Protection	IP50 IEC/EN60529
Warranty	5 years

### Optional Accessories


- AD17-24C (US): AC100V~240V/DC24V for terminal block, US adapter
- AD17-24D (EU): AC100V~240V/DC24V for terminal block, EU adapter
- US315-12(US/EU) : AC100~240V/DC12V ; 5.08mm pitch terminal block
- DIN-Rail mount, Wall mount

### Ordering Information


Model Name	Port Interface	Port Interface	
		Multi Mode ST Connector	Single Mode SC Connector
Extended Temperature (-10°C ~ 70°C)	10/100/1000BaseT(X)	100BaseFX	
EHG2308	8	----	----

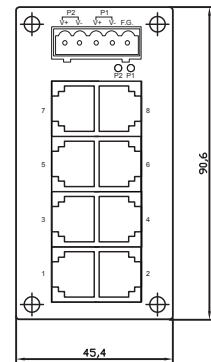

Front-panel front view

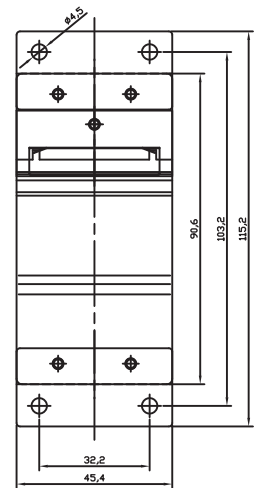

Backboard rear view

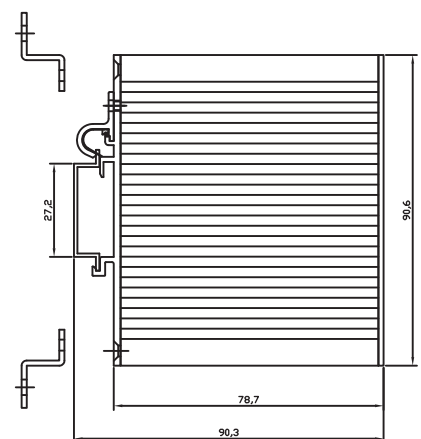

(Mount kit)

Housing side view

### Atop Technologies, Inc.

TEL : +886-3-5508137  
FAX : +886-3-5508131  
sales@atop.com.tw  
http : //www.atop.com.tw

Design and specification are subject to change without notice.

All product names referenced herein are registered trademarks of their respective companies.

