

STD32

The IP-based GSM telemetry solution with camera interface and on-board web server application



Features:

- Compact telemetry device with water-protected housing for professional use with camera interface sending photos via e-mail in alarm situations or on request. The camera is available as a Telic accessory.
- The web server application enables you to configure the STD32 online via the internet (standard browsers such as Firefox or Internet Explorer) as well as to trigger a photo from the connected camera.
- Use your mobile phone to receive up to two individual alarm messages via SMS in case the alarm system has been triggered.
- You can configure up to 5 different people who should be informed via e-mail or SMS in case of an alarm situation (e.g. private security service, facility manager, etc.).
- You can configure up to several hundred users who are able to switch the relays with a toll-free phone call (e.g. opening the garage door of an apartment block).
- You can configure the STD32 with a toll-free phone call, via the internet or via SMS.

Applications for alarms via E-mail and/ or SMS:

- Burglar alarm
- Surveillance
- Car alarm
- Boat and caravan alarm
- Water level control
- ... and many more

Applications for control tasks via internet or mobile phone:

- Heating system
- Air condition
- Switching of pumps
- Sauna
- Garage door
- Lighting
- Facility management in general (e.g. access control)
- ... and many more

Telic

Telematik & Telemetrie

STD32

Technical Parameters:

- Easy configuration and control via SMS or internet
- Pictures via e-mail
- 2 digital inputs
- 2 digital control outputs (6A at max. 230V)
- Internal 14 Pin connector (terminal block)
- 2 alarm messages via SMS or e-mail
- 5 alarm SMS and E-mail addresses
- 1 output can be controlled via toll-free phone call
- Up to several hundred users configurable
- 6 LED's for status information
- Easy installation in existing alarm systems
- Camera interface – separate Telic accessory

Power Supply:


- 5 to 32V DC supply

Temperature Range, Certificates:


- Operating temperature -30°C to +75°C
- CE approval
- RoHS compliant
- Made in Germany

STD32 - The telemetry solution with camera interface and web

SMS/E-mail alarm via GSM/GPRS

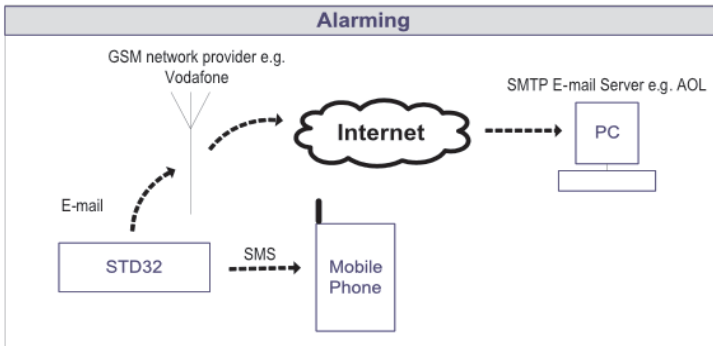

Access the STD32 from the internet

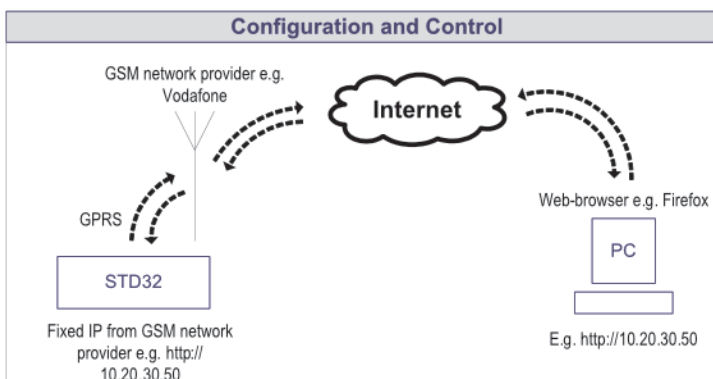

User Interface

Configuration & control via phone call or SMS:

- Toll-free configuration call / call to switch one relay
- Configuration / control of outputs via SMS


Use of web-server application to:

- Change all configurations (basic or advanced)
- Check the status of the inputs and outputs
- Retrieve pictures from the connected camera
- Set the outputs with one mouse click

Configuration and Diagnostic Tool

Telic's PC-based configuration tool supports the solution partner during the integration process and offers features such as:

- Direct connection via RS232
- Configuration of all relevant parameters
- Display of current status
- Trace and monitoring of device status
- Diagnostic of the device during and after installation
- Software download to the STD32

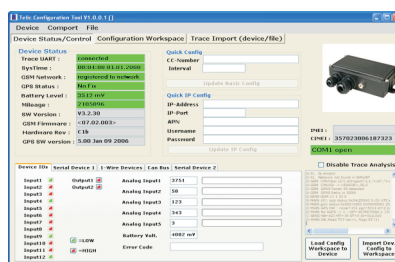

Available Accessories

- **Power supply** (230V / EU plug), compact and light-weight solution with open ends
- **Power cable** with open ends
- **Antennas** - different models on request
- **Telic camera** to be connected directly to the STD32

About Telic

Telic is a leading German supplier of telematics and telemetry products. Based on the core technologies GSM and GPS, Telic develops and manufactures high quality products, designed to be used in industrial and automotive environment. Telic's strong partnership with GSM and GPS module manufacturers secures the competitive edge in GSM, GPRS, UMTS and GPS technologies.

By using a platform concept, Telic is able to react flexible and fast to customers' requirements. This leads to cost-efficient solutions for system integrators and solution providers.

Telic Product Portfolio

- **STD35** is a high-end telemetry device for controlling filling levels, temperature as well as systems and facilities. The STD35 dominates all disciplines of professional remote monitoring and controlling.



- **Picotrack** is a very small and compact GSM/GPS tracking and alarming device for security applications as well as tracking of people and goods.



- **SBC3** is a telematics device for demanding fleet management and AVL applications. Apart from its very flexible connecting features, it has a robust casing. It meets all important installation criteria and comes either with the antennas inside or outside the casing.



How to contact us

Telic GmbH
 Raiffeisenallee 12b
 D-82041 Oberhaching/Germany
 Phone: +49 89 490 2686 - 0
 Fax: +49 89 490 2686 - 18
 Internet: www.telic.de
 E-Mail: info@telic.de



V. 1.3, February 2012

Note: Telic GmbH may at any time and without notice make changes or improvements to the offered products and services.