



Emergency and Telematics solutions for vehicles, mobile goods, containers, trailers and persons





Person Emergency Devices

iTelematics® iPhone	Alarm application on Smart-phones	iTelematics® GTS200	Ruggedized device
iTelematics® Mambo2	Programmable device	iTelematics® GTS100	Tracker
Sagem TGR 350S	Industry device	iTelematics® BLOQ	Smallest Tracker
X.com xxx	ATEX-device	ZERO	GSM device
XP 3340	Industry device programmable	Erweiterung	Inhouse localisation
SKYWALKING	Professional device		

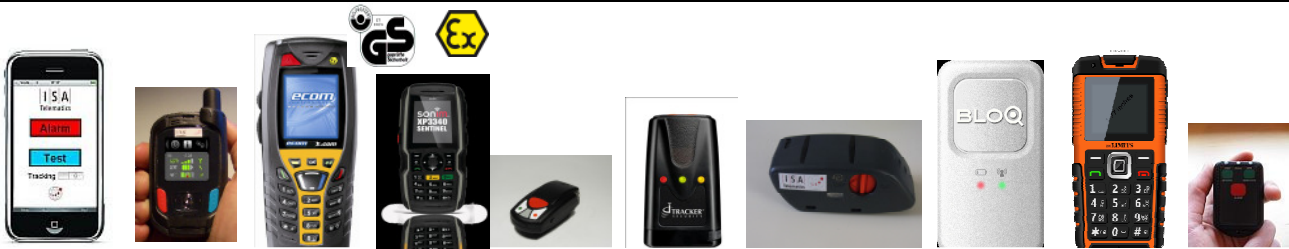

iTelematics® HL Control Centre

iTelematics® HLB Control Centre	Basic-Control Centre for standard applications
iTelematics® HLE Control Centre	Enterprise-Control Centre for complex applications
iTelematics® HL BG Control Centre	BG certificated Control Centre for persons
iTelematics® HL Platform	Open platform for GPS/GSM devices and services
iTelematics® Modules	Inhouse localisation Redundancy Interfaces Alarm centre Toll module Route and area supervision 24/7 technical hotline Web interface

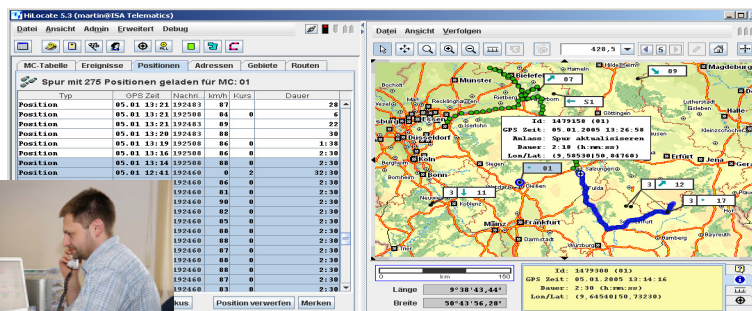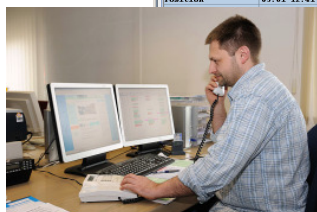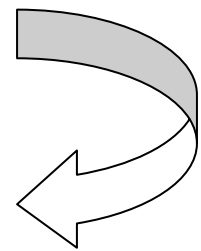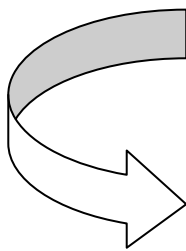

TelemonD® - Telematik-on-Droid	
TelemonD® Standard	Tracking/tracing, messaging, voice, alarm
TelemonD® Option	Navigation Order management Driving time analyses Theft protection Driver and truck information Electronic log book Security service Printer Bluetooth accessories Hardware and fixation



www.telemond.de

iTelematics® Bordcomputer	
iTelematics® 863GPS	Standard telematics
Optionen	Navigation display Display or PDA Driver and truck information Electronic log book Free speaking unit Printer Mobile time registration ID-Button Petrol measurement





Telematik for E-Cars	
iTelematics® CAT	Power measurement Energy consumption Tracking/tracing Distance Environment figures Cost control Charateristics



Certificates



Container/Trailer-Telematics	
HiLocate® Container	Independent Magnetic fixation
HiLocate® Solar	Solar powered
Container Security Box	Solar powered Magnetic fixation
HiLocate® Supervise	Independent
HiLocate® Secure	Security solution

Version: V16